


# MVP-Duplex Control Panel

## Applications

The MVP-Duplex control panel is specifically engineered for demand and timed dosing of onsite wastewater and water treatment systems. It's ideal for timed dosing in two-pump alternating systems. All MVPs include an easy-to-use, programmable logic unit that incorporates many timing and logic functions, such as multiple timing intervals to adjust for changing flow conditions and built-in elapsed time meters and counters. Any water or wastewater system that requires a timer would benefit from the MVP's accuracy and versatility.

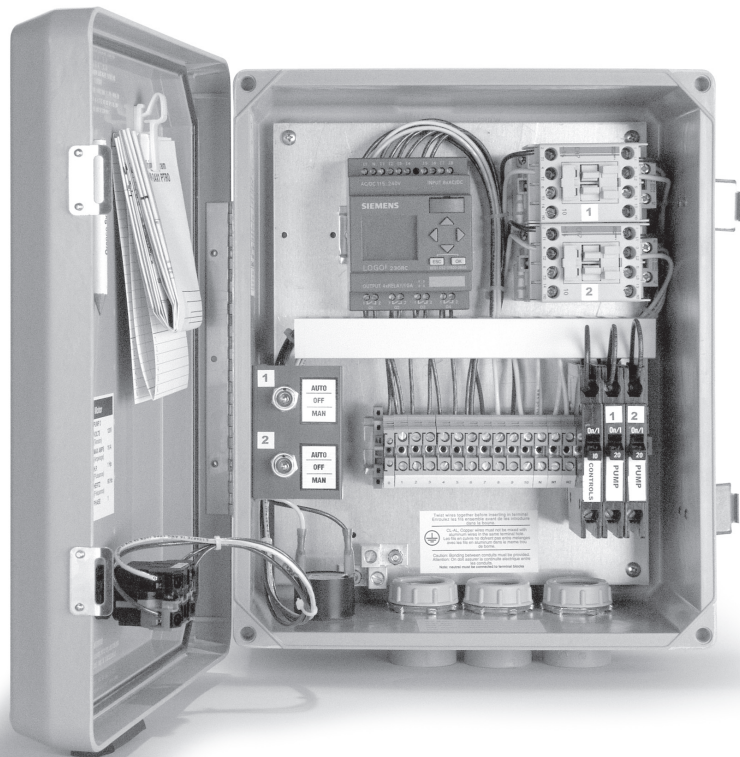

*Easy to set, accurate, and surprisingly affordable, the MVP brings intelligent control technology to the water and wastewater handling industries.*

## To Order

Call your nearest Orenco Systems® , Inc. distributor. For nearest distributor, call Orenco at 800-348-9843 or go to [www.orenco.com](http://www.orenco.com) and click on "Distributor Locator."

APS-CP-MVP-2  
Rev. 3.5 © 11/05  
Orenco Systems®, Inc.



**Orenco Systems®**  
Incorporated

*Changing the Way the  
World Does Wastewater®*

**800-348-9843**  
[www.orenco.com](http://www.orenco.com)

## Standard Features & Benefits

- Eight inputs and four outputs
- Intervals as long as 99 hours can be set with an accuracy of  $\pm 1\%$
- Simple setting instructions are easy to remember
- Built-in programming keys allow reprogramming in the field without a portable computer
- Parameters have understandable abbreviations
- For timed dosing, multiple timer intervals (normal timer, override timer) can be set to accommodate varying flow conditions
- When an alarm condition is reached, a minimum number of override cycles can be set to allow tank levels to drop, thus eliminating nuisance alarms
- Large, backlit LCD display is easy to read
- Ability to use one model of float for all functions simplifies installation
- UL 508 listed in US. Canadian listing also available
- Complete instructions and diagrams come with panel and are affixed to the inside, for in-field reference
- Three-year limited warranty

## Standard Features for System Maintenance

- Visual cues (indicators of float position and different alarm/light signals for varying alarm conditions) aid system maintenance
  - Built-in counters for low-level alarms, high-level alarms, overrides (on panels with timer), and power failures. Records total hours in service. These features provide valuable information for system maintenance and troubleshooting
  - Timed delays on float inputs prevent chattering and pump burnout
  - Automatic reactivation of silenced alarm (when problem is not corrected) prevents system failure
- (Optional features on back.)*

## Optional Features & Benefits


- Removable EEPROM card for reprogramming the panel in the shop or in the field
- UL698A (Intrinsically Safe listing) for use in hazardous locations
- Self-regulating anticondensation heater (radiates additional wattage as temperature drops)
- Current sensor to signal pump failures; ideal for recirculating filters
- Pump run light to indicate pumping activity

## Standard Models


MVP-DAX1 PTR0, MVP-DAX2 PTR0  
MVP-DAX1 RO, MVP-DAX2 RO

## Model Code for Ordering

MVP-DAX     RO

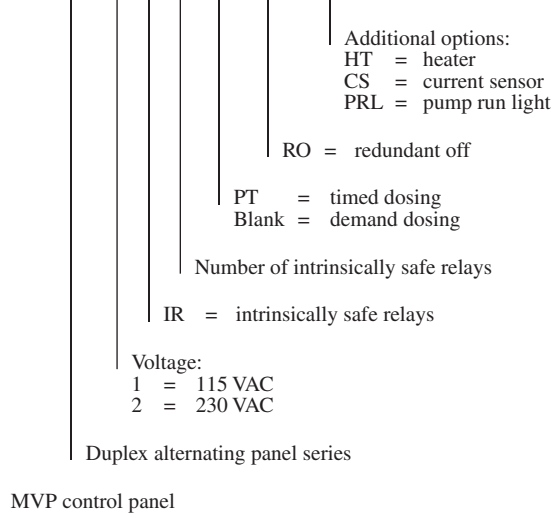

1. Programmable Logic Unit
2. Motor-Start Contactor
3. Toggle Switch
4. Controls Circuit Breaker
5. Pump Circuit Breaker
6. Audio Alarm
7. Visual Alarm
8. Panel Enclosure

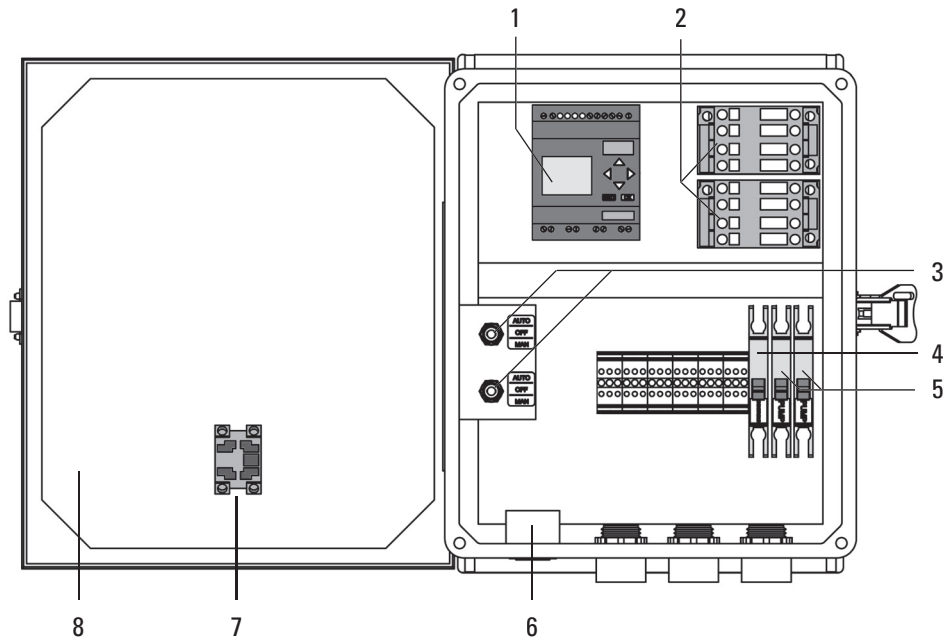

Distributed By: